

Category

Loudspeakers

Code

C53/10-T

Range

Ceiling-mounting Loudspeakers

Description

10 W Ceiling Loudspeaker


Circular ceiling loudspeaker for false ceilings made of white moulded sheet metal. Special spring-type hooks enable it to be secured rapidly and safely to the false ceiling. Connection to constant-voltage lines through a line transformer.




Technical data

Rated output power	10 W
Adjustable output power	10 - 5 - 2,5 W
Line voltage	70 - 100 V
Frequency response	70 ÷ 20.000 Hz
Efficiency (1W/1m)	93 dB
Acoustic pressure (Pnom/1m)	103 dB
Dispersion angle (-6 dB, 2 kHz)	80°
Dimensions (Ø x L)	265 x 78,5 mm
Weight	1,2 kg

Polar diagram (2kHz)

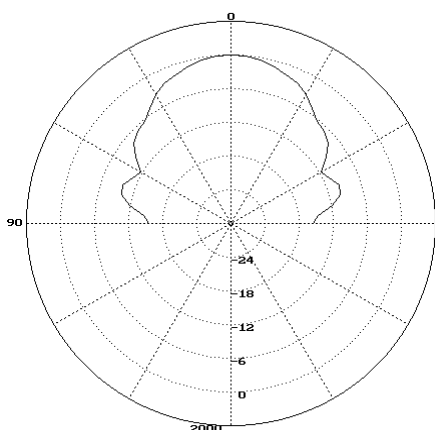

Frequency response

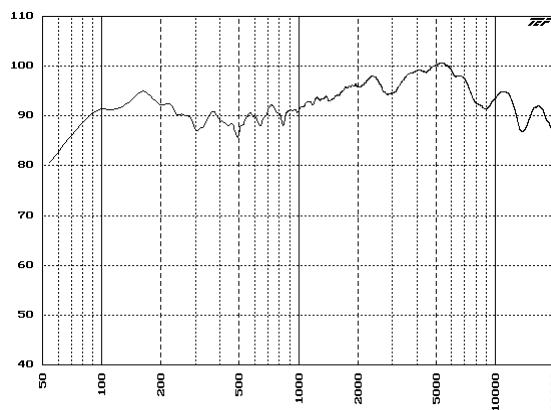

Connections

POS.	A	B	C	D
Z	490 Ω	1K	2K	4K
LINE	POWER			
70V	10W	5W	2,5W	•
100V	•	10W	5W	2,5W
COM	NERO - BLACK			

Dall'amplificatore / From the amplifier →

